


| REV | DESCRIPTION | BY | DATE | ECN |
|-------------|---|-----|---------|-------|
| \triangle | ENGINEERING RELEASE | AGJ | 5-26-93 | 22833 |
| В | NOTE I WAS MOUNTING TYPE: OPTION F | AGJ | 5-13-02 | 41044 |
| | 6.9/5.8 [.27/.23] WAS 6.4/5.8 [.25/.23] | AGJ | 9-30-03 | 45244 |
| | NOTE 2 WAS OUTPUT SHAFT: OPTION 04 & 28 | PM | 4-4-06 | 54522 |
| | 9.0/6.6 [.35/.26] WAS 8.7/7.1 [.34/.28] | PRK | 7-08-09 | 18025 |
| | | | | |

- Ø 31.75 [1.250] FLAT ROOT SIDE FIT 14 TOOTH 12/24 SPLINE TO FIT ANSI B92.1 1976

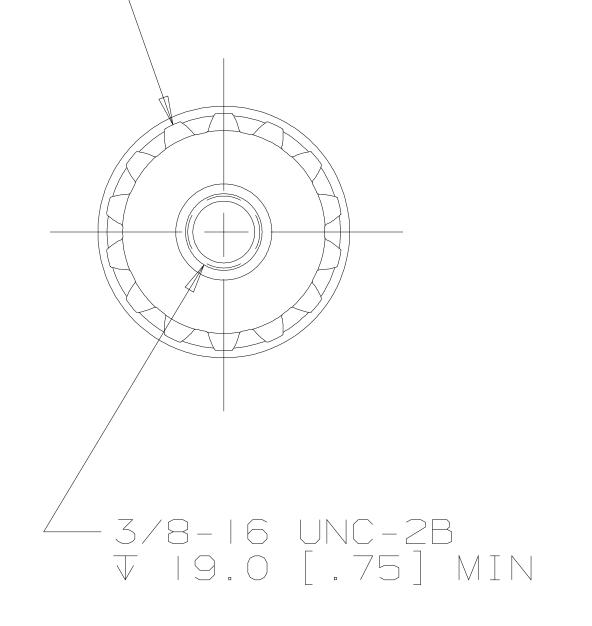

NOTE

MOUNTING TYPE: OPTION AF

2 OUTPUT SHAFT: OPTION 04 & 21

DRAWING BASED ON ANSI Y14.5M-1982

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)

MILLIMETERS [INCHES]

Danfoss

| TOLERANCES .x ± | RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016) | | | | | |
|--|--|---|--------------|----------|--|--|
| . XX | DRAWN A. JOHNSON BY/DATE 3-19-93 CHECKED SDR 6-24-93 | MATERIAL/HEAT TR | EAT | | | |
| UNSPECIFIED RADII ARE ———— | ENGRG BY/DATE SJZ 6-28-93 METALLURGY BY/DATE | 2000 SERIES MOTOR Shaft installation | | | | |
| UNSPECIFIED DRAFT ANGLES ARE — — — — | THIRD ANGLE PROJECTION | MICROINCHES MICROMETERS [MICROINCHES] | NUMBER A - S | 5-004 | | |
| DRAWING FORMAT CADD X MANUAL | DO NOT SCALE | ARITHMETICAL AVERAGE | SCALE / | SHEET OF | | |