


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RJ	8-27-92	22819
B	NOTE I WAS MOUNTING TYPE: OPTION F OR J	AGJ	3-8-94	M11397
	71.4/69.0 [2.91/2.72] WAS 71.6/69.0 [2.82/2.72]	AGJ	5-17-04	47918
	-I)MOUNTING TYPE WAS VFV -2)OUTPUT SHAFT WAS VI6V	SSD	1-24-07	0002527

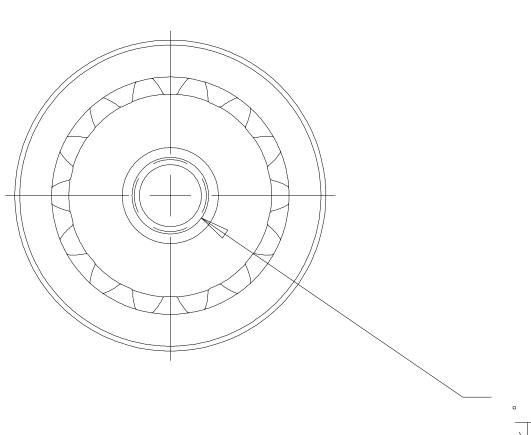

-.375-16UNC-2B ▼ 18.7 [.74] MIN FULL THREAD

un	
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN	DRAWING BASED ON ANSI Y14.5M-1982
INCHES MILLIMETERS [INCHES] TOLERANCES .x ±	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)
.xx ±REF	DRAWN BY/DATE RJ 9-22-92 MATERIAL/HEAT TREAT
. XXX ± () Y	CHECKED SDR 9-25-92 BY/DATE SDR 9-25-92
UNSPECIFIED RADII ARE	ENGRG BY/DATE MLB 9-25-92 TITLE 4000 SERIES MOTOR
	METALLURGY SHAFT INSTALLATION
UNSPECIFIED Draft angles are	MICROINCHES NUMBER MICROINCHES NUMBER MICROINCHES O
DRAWING FORMAT cadd 🛛 manual 🗌	DO NOT SCALE ARITHMETICAL AVERAGE SCALE / SHEET OF